

SILICONE

See other installation options on website for using: Instant Adhesive - Velcro - Screws

USE ONLY: "100% Silicone rubber sealant" ... must be fresh!
Do NOT use adhesives like - Liquid Nails, Contact Cement, LePage PL, Polyseamseal etc.
BoingSafety product warranty is voided if non-approved adhesive is used.

Tools/Equipment: Silicone + Caulking Gun (300 ml) + Cleaning Rag + Solvent

Example: GE Clear




Use only "fresh" silicone
Read supplier instructions

- Ensure that non-porous surfaces are clean and dry (painted or unpainted)
 - ★ Works on Sheetrock/Drywall/Gyprock /Concrete block/Ceramic tile/Metal/Wood etc.
 - ★ Make sure that painted surfaces are not flaking or the silicone will pull off.
 - ★ Seal/Waterproof moist/damp areas (see Waterseal info below)
- Wipe down "inside" part of the foam padding to remove any possible leftover mold release
 - use any good cleaning solvent or isopropyl alcohol
- Cutting to Size
 - all **non-aluminum Boing** products can be cut to size with a very sharp, **long and thin** bladed knife.
 - Option : If you want a custom fit with no exposed interior foam:
 - measure the total space to be covered;
 - cut out a piece from the center of the **Boing** pad equal to the excess length ;
 - re-connect the 2 remaining sections.



- Apply silicone to the back side of the **wall pad, corner strip, jumbo guard**
 - start with a bead around the outer edge
 - keep the perimeter bead about **1/4" from the edge**
 - add more silicone in a **Zig Zag** pattern

- Attach to surface - after applying silicone:
 - immediately place the strip or corner or wall pad in the location you desire;
 - make any last minute positioning adjustments;
 - press a little harder all over the panel/strip to ensure a good bond;
 - for panel, press 30-60 seconds, corner strip or corner guard, press 20-30 seconds;
 - as necessary, temporarily "secure" the padding until the silicone cures.

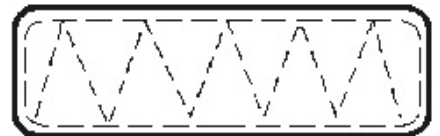

- Best to "seal" any torn or cut exposed foam with a thin film of silicone.
- Add a small "bead" of silicone around outer edges to reduce attempts to peel off.
 - clean off any excess silicone - see Silicone Removal on website FAQ's
- Do not touch for at least 12 hours (24 hours to fully cure)

DAILY/WEEKLY CLEANING & MAINTENANCE:

Use any general household cleaner + soft cloth

Do not use harsh abrasive scrubbing agents

Do not use strong chemicals like Citrus spray or Bleach

SILICONE REMOVAL

DAP "Silicone-Be-Gone" (see DAP website for store locations)



Effective 1 October, 2016

Silicone Adhesive Safety:
Read safety instructions on tube

One tube of silicone* is good for:
2-3 Wall Pads
6-8 Corner Strips
12-14 Jumbo Corner Guards

WET/RAINY AREAS

- ★ moisture will affect the adhesive
- ★ make sure all areas are clean/dry
- ★ seal/waterproof all surfaces
- ★ ensure bead of sealant around edge



PRESSURE TREATED WOOD

- ★ before using silicone adhesive
- ★ allow plenty of time for wood to dry
- ★ 3 weeks to 6 months
- ★ depends on climate
- ★ depends on wood treatment

* The aluminum reinforced corner strips are generally attached with screws (provided)*

136 Walker Street, Atlanta GA 30313
TEL 404-521-9054 ORDER: 800-477-6434 FAX: 404-222-8366
wwwBoingSafety.com info@BoingSafety.com

Instant Adhesive - *For many applications* on small, smooth surfaces
Velcro Solution - *For removable applications*